




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01S 3/02		A1	(11) International Publication Number: WO 98/10307
			(43) International Publication Date: 12 March 1998 (12.03.98)
(21) International Application Number: PCT/US97/15892		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 8 September 1997 (08.09.97)			
(30) Priority Data:			
60/025,855	9 September 1996 (09.09.96)	US	
60/044,821	25 April 1997 (25.04.97)	US	
Not furnished	20 August 1997 (20.08.97)	US	
(71)(72) Applicants and Inventors: DUPRAY, Dennis, Jay [US/US]; 222 South Marion Parkway, Denver, CO 80209 (US). KARR, Charles, L. [US/US]; 400 Sandbrook Lane, Tuscaloosa, AL 35405 (US).			
(74) Agents: KOVARIK, Joseph, E. et al.; Sheridan Ross, P.C., Suite 3500, 1700 Lincoln Street, Denver, CO 80203-4501 (US).		<p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: LOCATION OF A MOBILE STATION

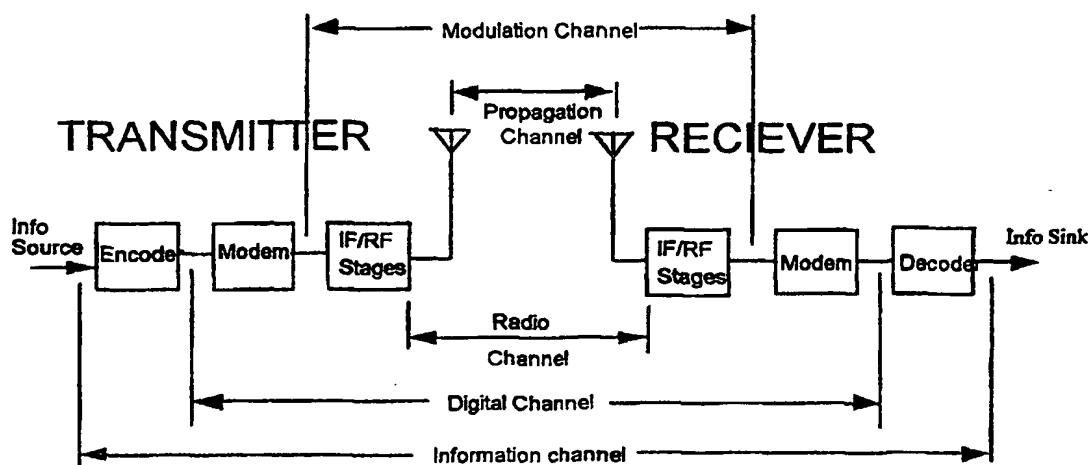

Communications Channel Definitions

(57) Abstract

A location system is disclosed for commercial wireless telecommunication infrastructures. The system is an end-to-end solution having one or more location centers for outputting requested locations of commercially available handsets or mobile stations (MS) based on, e.g., CDMA, AMPS, NAMPS or TDMA communication standards, for processing both local MS location requests and more global MS location requests via, e.g., Internet communication between a distributed network of location centers. The system uses a plurality of MS locating technologies including those based on: (1) two-way TOA and TDOA; (2) pattern recognition; (3) distributed antenna provisioning; and (4) supplemental information from various types of very low cost non-infrastructure base stations for communicating via a typical commercial wireless base station infrastructure or a public telephone switch network.